

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number
WO 2005/053902 A1

(51) International Patent Classification⁷: **B24B 7/18, 55/10**

(21) International Application Number:

PCT/DK2004/000848

(22) International Filing Date: 8 December 2004 (08.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

PA 2003 01806 8 December 2003 (08.12.2003) DK

PA 2004 01457 24 September 2004 (24.09.2004) DK

(71) Applicant (for all designated States except US): **FLEX TRIM A/S** [DK/DK]; Lyngvænget 6, Glyngøre, DK-7870 Roslev (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **JESPERSEN, Poul, Erik** [DK/DK]; Lyngvænget 6, Glyngøre, DK-7870 Roslev (DK).

(74) Agent: **PATRADE, A/S**; Fredens Torv 3A, DK-8000 Århus C (DK).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: GRINDING APPARATUS

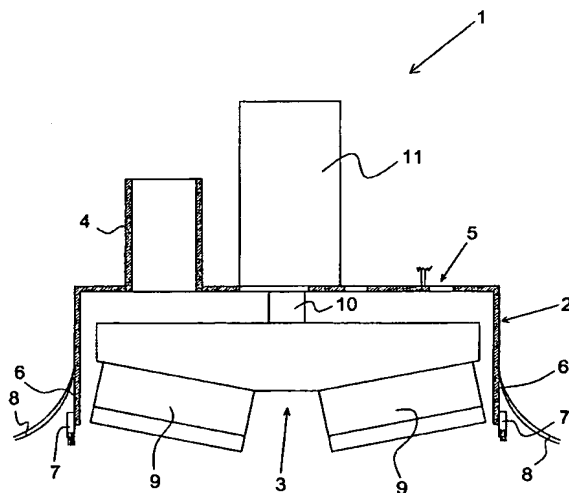

(57) Abstract: The present invention concerns a grinding apparatus (1) including a number of grinding units (3), a number of drive units (11) and a number of screen units (2), where a number of the grinding units (3) are enclosed by at least one of the screen units (2), and where at least one the screen units (2) is arranged with a pipe connection (4) adapted for connecting one or more suction units (21), where the screen unit (2) with the pipe connection (4) is designed along a lower edge (6) with a number of spacer members (7) that are arranged adjustable and replaceable, and a number of sealing members (8) that fit tightly to an underlying surface, that the spacer members (7) establish an adjustment of spacing of the grinding units (3) relatively to an underlying surface, and that the sealing members (8) interact with the suction units (21) for forming a vacuum that holds the grinding apparatus (1) against the said surface during operation.

WO 2005/053902 A1